


Rogowski AC Current Probe

RCP series

- ▶ Bandwidth: 10Hz-30MHz
- ▶ Accuracy (typical): 1%
- ▶ Output noise: < 12mVpp
- ▶ Current range: max 600Apk
- ▶ Coil cross-section: 1.6mm
- ▶ Standard BNC interface

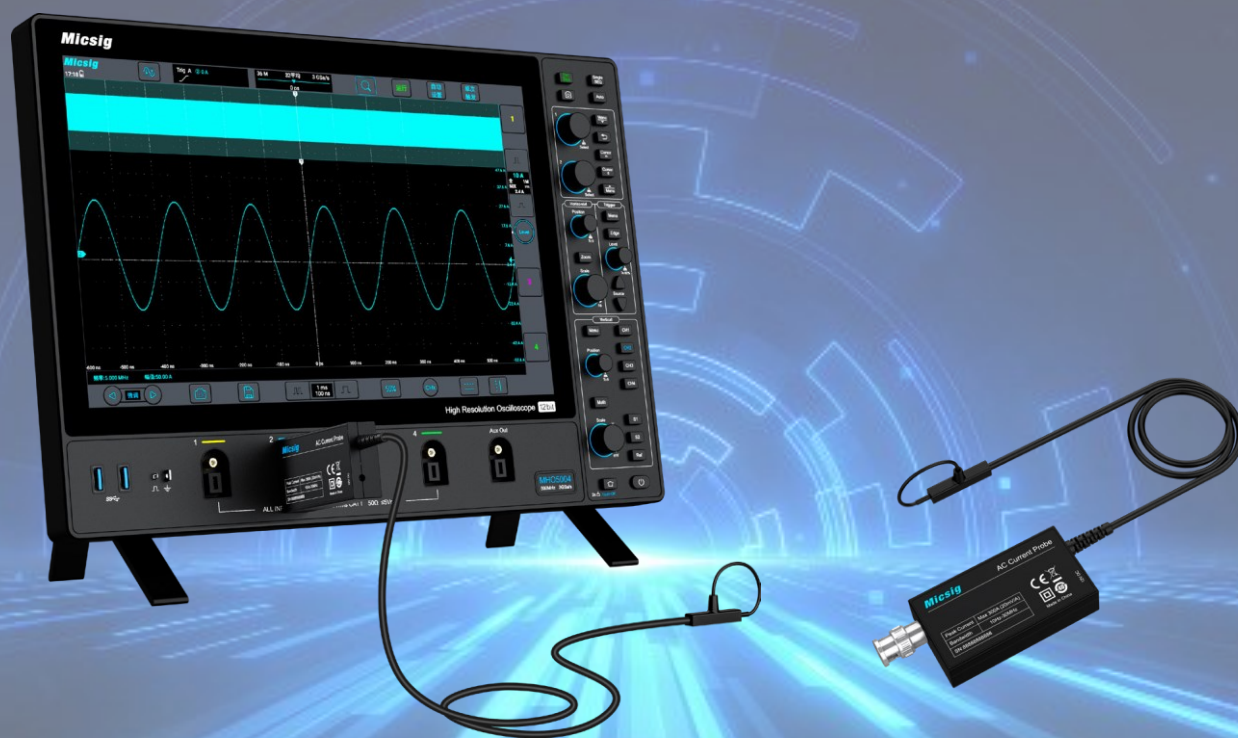

PRODUCT OVERVIEW

Micsig Rogowski current probe RCP series measures AC currents up to 600A_{pk}, max. bandwidth up to 30 MHz, delivers 1% typical accuracy, able to measure high-frequency, large current signals easily and accurately.

Smaller coil cross-section

The cross-sectional diameter of the coil is only 1.6mm, allow engineers measure current in most difficult-to-reach parts of the circuit, such as TO-220, TO-47 MOSFET.




Applications

- Measurement of 50/60Hz power frequency current
- Measurement of harmonic components in the current
- Measurement of pin currents in MOSFET or IGBT devices
- Measurement of load current and high-order harmonic current in power electronics

Measure the Id current of MOSFET

Excellent high-frequency measurement capabilities, easily measures high-speed signals, able to observe HF harmonic components when measuring the Id current of MOSFET (as shown the oscillation section).

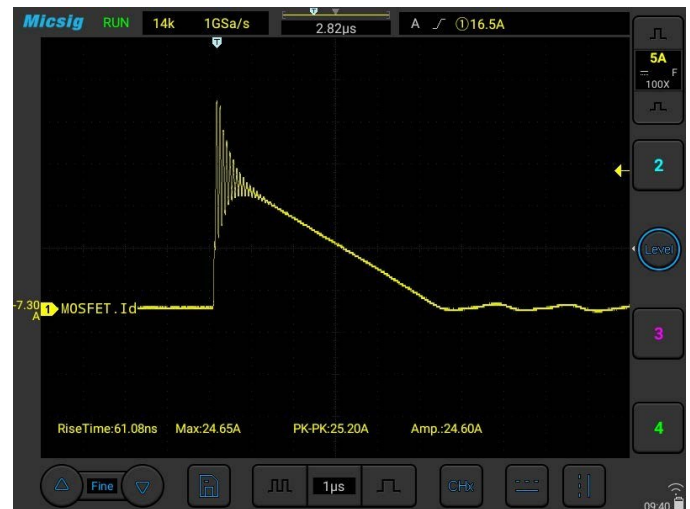

Specifications

Model	RCP300 XS	RCP600 XS
Bandwidth	10Hz-30MHz	10Hz-30MHz
Measurement range	200mA _{pk} -300A _{pk}	200mA _{pk} -600A _{pk}
Output sensitivity	20mV/A (50X)	10mV/A (100X)
Accuracy (typical)	1%	1%
Peak di/dt	20kA/μs	40kA/μs
Droop (%/ms)	9%/ms	6%/ms
Output noise	< 18mV _{pp}	< 12mV _{pp}
Peak coil isolation voltage	AC 2kV _{rms} (1 min) (50Hz/60Hz) (Rogowski coil part only)	
Coil cross-section diameter	1.6mm	
Interface	1MΩ BNC	

© 2018 Micsig Technology Co., Ltd. All rights reserved. Micsig is a registered trademark of Micsig Technology Co., Ltd.

Micsig

Shenzhen Micsig Technology Co., Ltd.

Tel: +86-(0)755-88600880 Email: sales@micsig.com Website: www.micsig.com

Address: 1F, Bldg A, Huafeng International Robot Industrial Park, Hangcheng Rd,

Bao'an District, Shenzhen, Guangdong, China, 518126