


AC/DC Current Probes
CP2100 Series

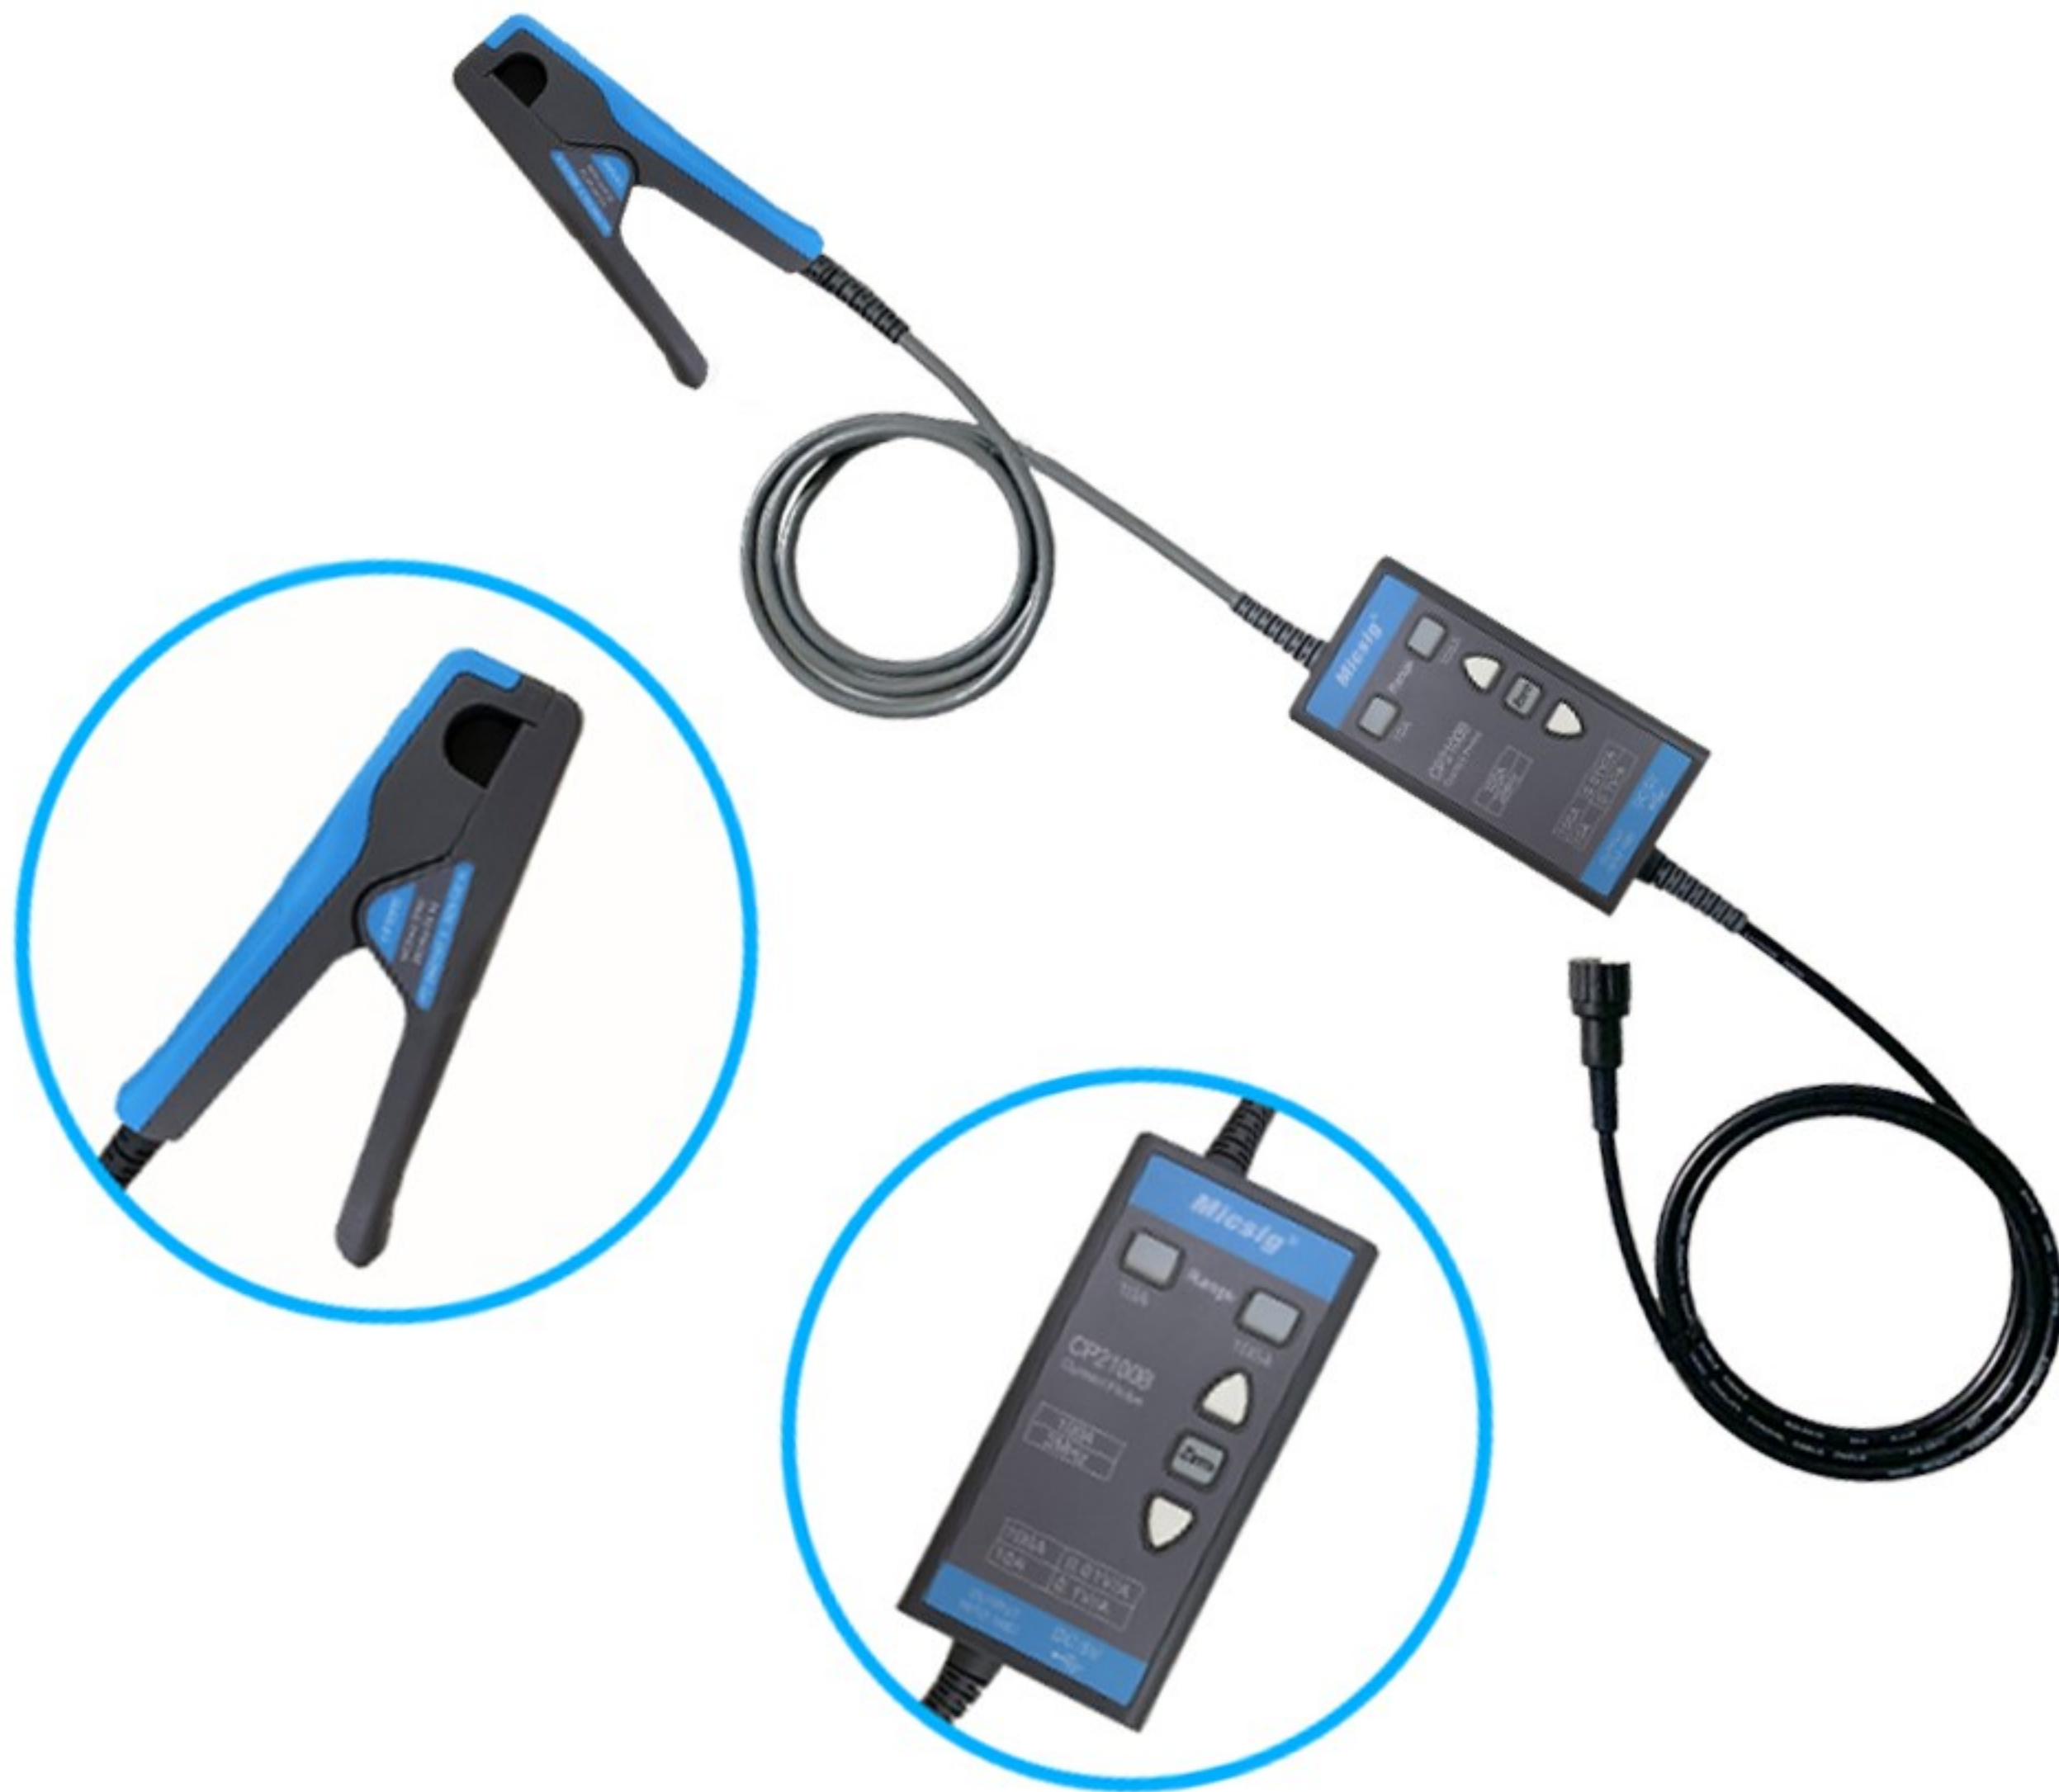

Key performance specifications

- Bandwidths up to 2.5 MHz
- Powered by USB, making measurement easier
- Both automatic and manual zero adjustments are available
- Maximum measurable current, 100Apk, 70.7Arms (DC+ACpk)

Model	CP2100A	CP2100B
Bandwidth	DC~800KHz	DC~2.5MHz
Rise time	≤175ns	
Ranges	10A/100A	
Output sensitivity	0.1V/A (10A) 0.01V/A (100A)	
DC accuracy(typical)	3%±50mA (10A) 4%±50mA (100A, 500mA~40Apk) 15% (100A, 40Apk~100Apk)	
Signal delay	<150ns (10A) <200ns (100A)	
Current measurement range	50mA~10Apk (10A) 1A~100Apk (100A)	
Maximum measurable current	100Apk, 70.7Arms (DC+ACpk) 200Apk-pk, 70.7Arms (AC)	
Maximum working voltage	CAT III 300V CAT II 600V	
Maximum float voltage	CAT III 300V CAT II 600V	
Maximum conductordiameter	13mm	
Overload indication	The buzzer beeping, the button light flashing	
Power supply	DC 5V	
Probe head size	11*6.1*2.5cm	
Control box size	10.8*5.6*2.6cm	

Shenzhen Micsig Instruments Co., Ltd
Tel: +86-755-86-88600880
Web: www.micsig.com E-mail: sales@micsig.com
Add: 305 Block A, CLOU Building, Baoshen RD, North Area, Nanshan
Science& Technology Park, Shenzhen, Guangdong, China . 518000