


TekExpress Automotive Ethernet Signal Separation and PAM3 Analysis

Signal Integrity and Protocol Decode Datasheet

Get more visibility into your PAM3 automotive Ethernet designs

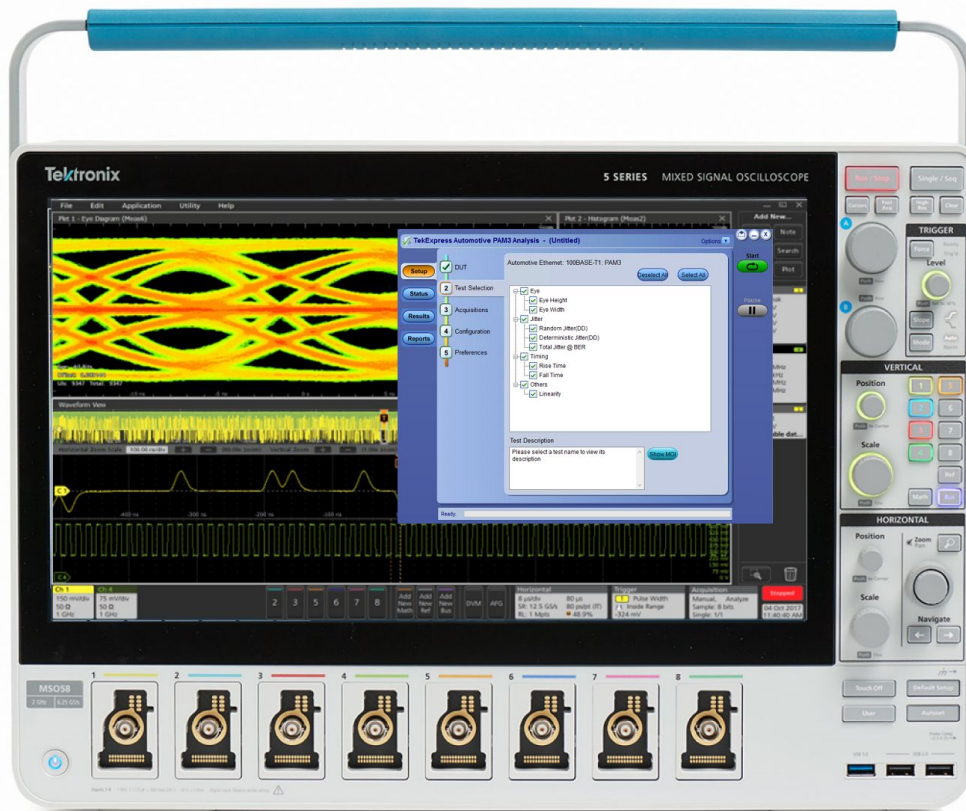

For Automotive Ethernet designing, testing, and debugging, Tektronix offers the comprehensive PAM3 Signal Analysis, Signal Quality test, and Protocol Decode testing solution.

Key features

- **Signal Separation software:** Tektronix Signal Separation software (Patent pending) lets you perform Signal Analysis or Protocol Decode without effecting the ECU system or installing a direct coupler by cutting the Ethernet cable.
- **PAM3 Analysis:** You can perform PAM3 Analysis to measure Eye Opening, Eye Mask testing, Jitter Separation, and BER plot in real ECU environment for the Master ECU or Slave ECU.
- **Enhanced Clock Recovery:** Software clock recovery offers the industry's most robust clock recovery capability even from heavily impaired signals.
- **Signal Quality Test:** You can perform Open Alliance TC8 Signal Quality test with an Eye Diagram instead of a Signal Quality Index (SQI) value. The Eye Diagram in a noise condition provides better insight compared to the SQI value.
- **Protocol Decode:** The Tektronix PAM3 solution offers simultaneous Protocol Decode of Master and Slave ECUs, using the Signal Separation technique.
- **Comprehensive Reporting:** Automated reporting with Pass/Fail screenshots of the waveforms.

Automotive Ethernet overview

The Autonomous Driving Assistance System (ADAS) and human-to-machine subsystems generate vast amount of data to transport through a vehicle. Requirements for greater integration between vehicle subsystems are driving fundamental architectural changes, moving from simple ring networks to more complex topologies, including gateways connected to an Automotive Ethernet backbone.


Automotive Ethernet is quickly becoming the fastest growing technology for in-vehicle networks.

Automotive Ethernet provides significant advantages including:

- PAM3 modulation supports high data rates and reliability
- Unshielded and single twisted-pair cabling lowers cost and weight
- Full-duplex communication allows devices to send and receive simultaneously on a link
- Proven IT technology with reliable data throughput for safety critical systems

The integration of Automotive Ethernet technology is placing greater demands on comprehensive design validation to ensure interoperability and reliability between multiple ECUs and devices that will perform reliability in demanding environments. To meet strict compliance tests and have greater confidence in design margins operating under real world conditions, a complete testing solution is a necessity.

Automotive Ethernet and Full Duplex Communication

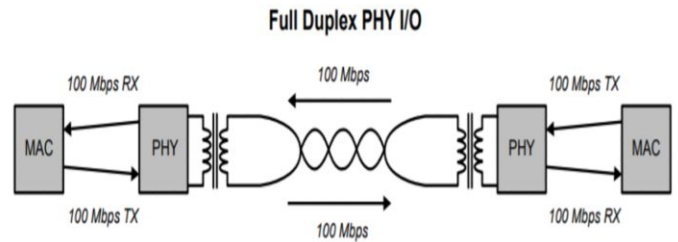

Automotive Ethernet operates as a full-duplex communication link over a twisted pair cable. The full-duplex communication along with PAM3 signaling adds complexity in validating the ECUs in the real world conditions.

To perform Signal Analysis over the link and Protocol Decode in a real system environment, automobile designers need to look at each link separately which requires the user to separate the signals before performing analysis. Unfortunately, many of the current testing solutions requires breaking the Automotive Ethernet cable to perform the testing. This introduces additional test challenges. The Tektronix PAM3 Signal Analysis application solves these issues with a comprehensive testing solution.

Use Cases


Customer	DUT Type	Job to be done
PHY Silicon companies	Automotive Ethernet PHY Silicon	<ul style="list-style-type: none"> Compliance Test as per Open Alliance Protocol Test at the system level
Automotive T1 companies, Cable manufacturer	ECU	<ul style="list-style-type: none"> Compliance and Interop test as per Open Alliance Signal Quality Test Protocol Test
	System: ECU to ECU, ECU to Sensor, Cable	<ul style="list-style-type: none"> System performance under noise Cable selection
	Performance Test	<ul style="list-style-type: none"> Performance Test <ul style="list-style-type: none"> Manufacturing Variation Test
Automotive OEM	In-Car Testing	<ul style="list-style-type: none"> Performance Test <ul style="list-style-type: none"> Manufacturing Variation Test Performance Test under various scenarios <ul style="list-style-type: none"> Cracking DC Motor Protocol Test Debug

Signal separation

As Automotive Ethernet is full-duplex communication, both ECUs can send and receive the data simultaneously on the same link. To perform Signal Analysis or Protocol Decode in a real system environment, the traffic of the Master and the Slave ECU needs to be separated.


One approach to separate the full-duplex signal is to use a Directional coupler. This approach requires the user to cut the cables to install the Directional coupler. Using a Directional coupler adds its own Insertion loss and Return loss which can negatively impact the testing results. While it is possible to compensate for the loss at the setup level, the directional coupler approach disturbs the system, making it difficult to know if the errors are introduced by the additional hardware.

To avoid erroneous measurements, Tektronix unique Signal Separation separates the full-duplex signal using the advanced software. The Signal Separation solution accesses the voltage and current waveform from either the Master or Slave Test point, or from both sides simultaneously using the Tektronix proprietary Signal Separation algorithm. This method displays true ECU signals (Master and Slave) without impacting the ECU system.

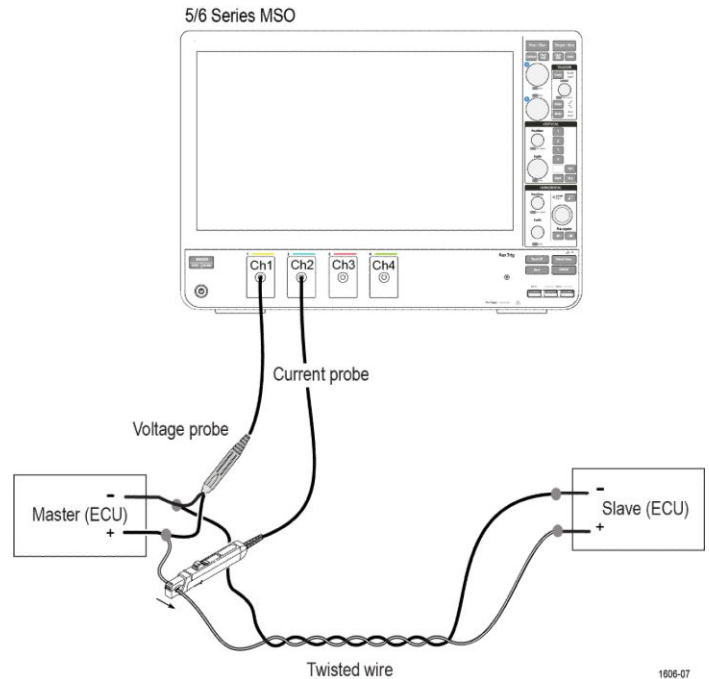

The Tektronix Signal Separation software can separate full-duplex traffic for testing real ECU test conditions, including different cable lengths and types, different ECUs, ECU-to-Switch conditions, ECU and Protocol Analyzer, different noise conditions, and inside the car with the Automotive Ethernet connectivity.


Refer to the Signal Access section to learn more about how to connect the voltage and current probes for different testing situations.

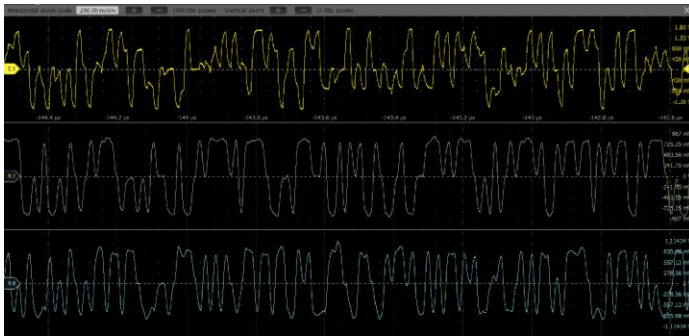

Full-duplex Signal Separation using software method


Ease of use: It is easy to connect the voltage and current probes without disturbing the cables. You can directly connect probes to the ECU connector. If a fixture is needed to access signals, Tektronix can provide assistance to design a fixture to connect the voltage and current probes.

Automation: The TekExpress Ethernet Signal Separation and PAM3 Analysis software is a completely Automated test solution. Using the Tektronix TekExpress automation platform, its user interface design guides you step-by-step to configure the system and perform analysis.

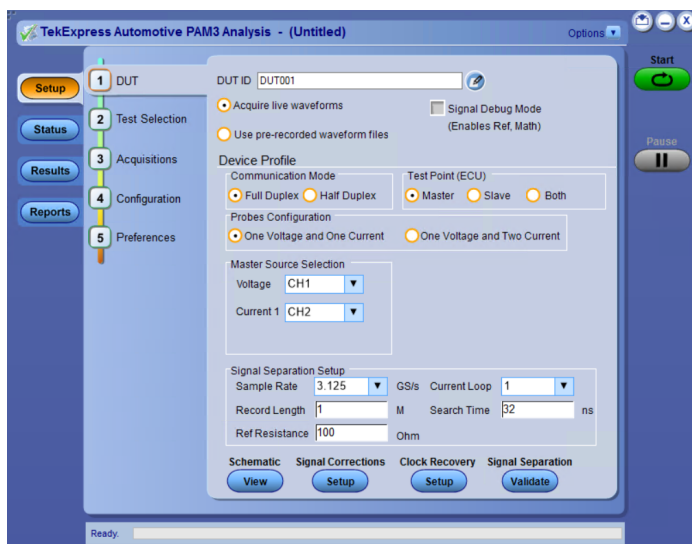


PAM3 Analysis: The following three levels of PAM3 introduce additional complexity in signaling and place new demands on the test methodology. The PAM3 analysis tool offers several measurement and visualization capabilities to make the task of validating Automotive Ethernet PAM3 designs more efficient.

PAM3 Measurement configuration: The configuration panel within the PAM3 analysis tool let you configure most elements for a PAM3 analysis run. The setup tool includes measurement source selection, clock recovery, and threshold configuration.

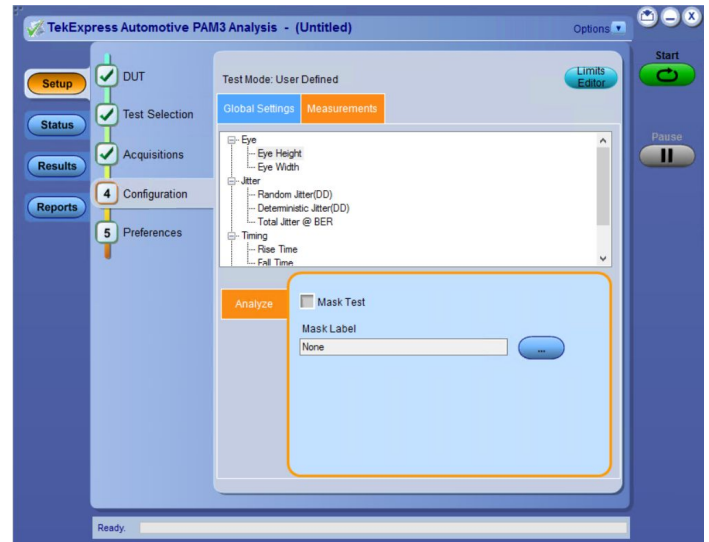


Measurement configuration

Clock recovery: The configurable PLL (Phase-Locked Loop) clock recovery function reliably extracts the symbol clock, even with highly impaired signals, and exports the reconstructed clock waveform to a reference channel where it is viewed.

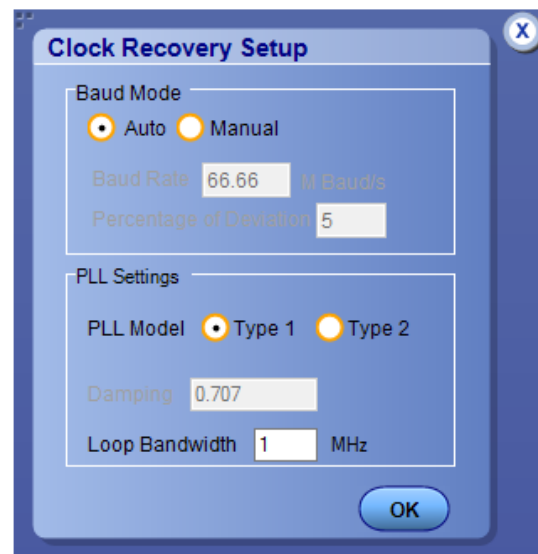

PAM3 measurements: The PAM3 analysis package provides a comprehensive set of measurements that offer greater insight into signal characteristics, speeding up validation or characterization of PAM3 designs with different cable length, noise conditions ECU configurations, and so on.

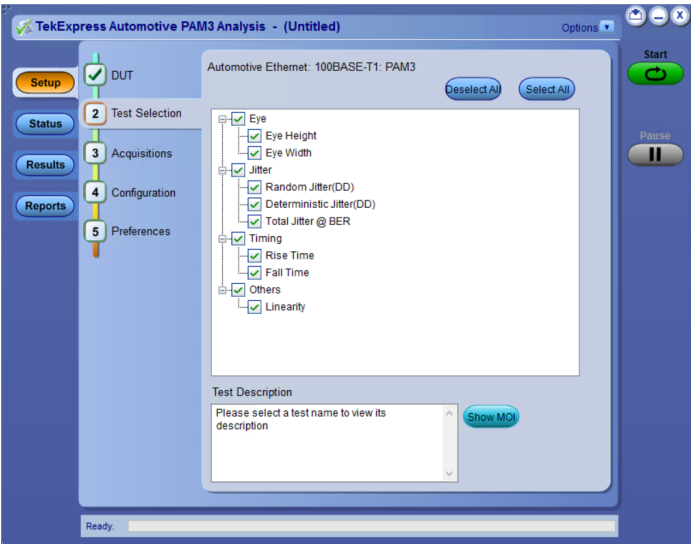


PAM3 measurements

PAM3 measurements


Measurement group	Measurements
Eye diagram	Eye Height
	Eye Width
	Eye Mask
Jitter	Random Jitter (DD)
	Deterministic Jitter (DD)
	Total Jitter @ BER
Timing	Rise Time (Symbol 0->1, -1->1 and -1->0)
	Fall time (Symbol 0->-1, 1->0 and 1->-1)
PAM3 Modulation	Linearity

Visualization: A comprehensive set of plots let you visualize the measurement data. The plots provide insight into the signal characteristics and are useful for debugging.


The plot tool set enables interaction with the plots, helping you to focus on an area of interest for closer examination and further analysis.

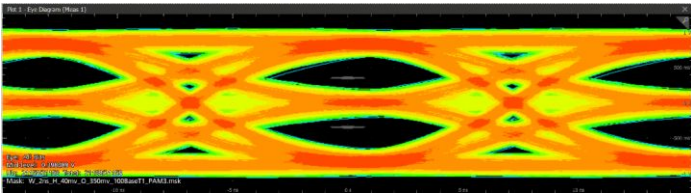


Automotive Ethernet Near End Eye diagram

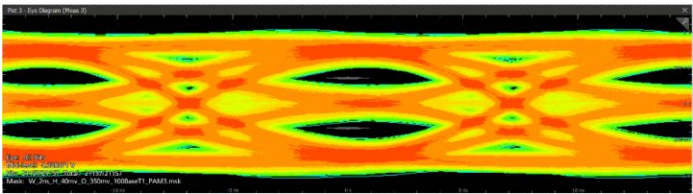

Automotive Ethernet Far End Eye diagram

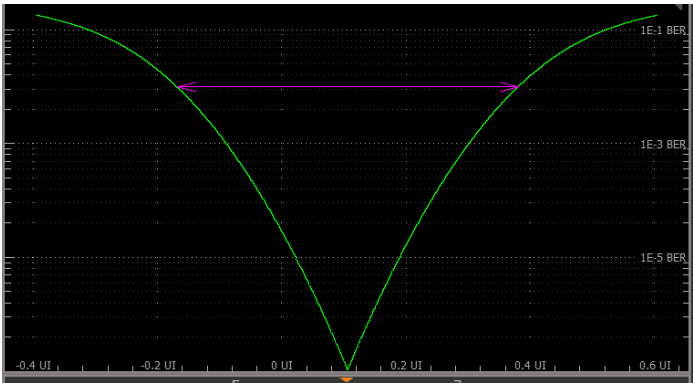


BER Bathtub plot

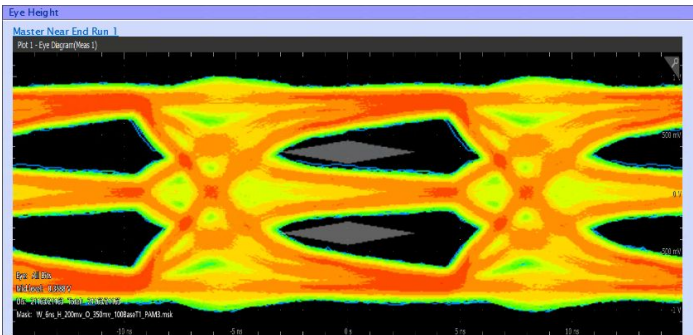

Eye Mask test

Multi-run for Signal Characterization: The PAM3 Analysis solution lets you to run the measurements multiple times to characterize ECU with different conditions. You can also set the PAM3 Automation software to pause on failure to debug the issue. All the waveforms from different runs can be saved in a folder to analyze and debug later.

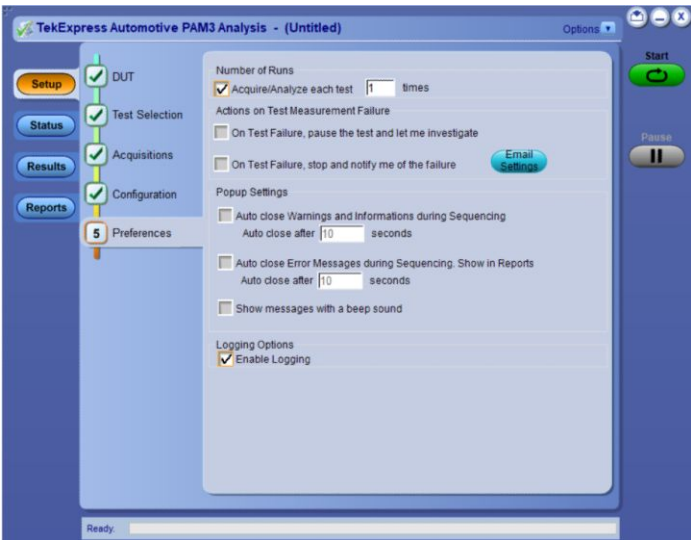

Preferences settings

Pass fail reports


Creating the test report documentation is quick and easy with a summary report in MHT or PDF format. The report provides Pass/Fail status and is automatically generated after the test execution is completed. The report includes test configuration details, waveform plots, oscilloscope displays, and margin analysis, to provide more insights into your design.



Detailed test report

Signal quality test


The Open Alliance TC8 Signal quality test requires adding Gaussian noise on the Ethernet cable to check the noise level at which the ECU full-duplex communication breaks. While users can read the SQI register value from the Automotive Ethernet PHY to find out Signal Quality Index, the SQI value will not represent the Eye diagram or any debug tools to find out the root cause of the problem.

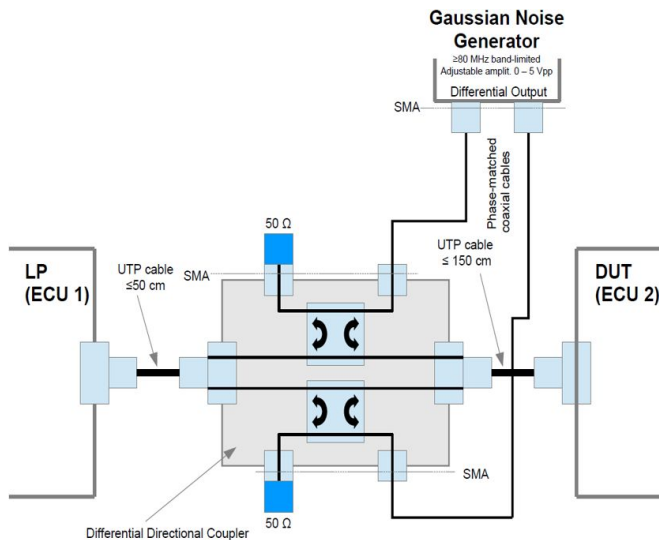

With Tektronix Signal Separation, you can separate the full-duplex signal and display the Eye diagrams to debug further. The PAM3 Analysis tools let you debug the cause of the link failure. You can also perform a Protocol Decode test to check at what point the link fails.


Cable Performance Test, Production Pass/Fail Test, and ECU signal Integrity test: The Open Alliance has defined Automotive Ethernet cable tests covering Return Loss and Insertion loss. It is important to know how different cable lengths and cable types affect the Automotive Ethernet signal integrity.

Tektronix Signal Separation software lets you plot the Eye diagram for different cable lengths and cable types to compare their performance.

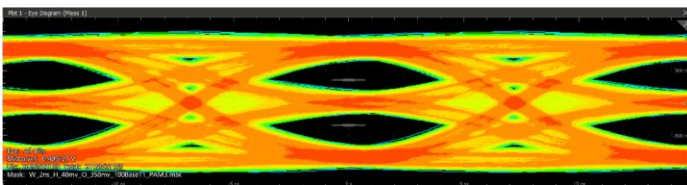

Eye diagram of a three meter cable

Mask test: You can define your own mask to perform Eye Mask testing for the different cable lengths, production pass/fail testing, or ECU performance testing. The TekExpress solution also provides predefined masks that can be used for your requirements.

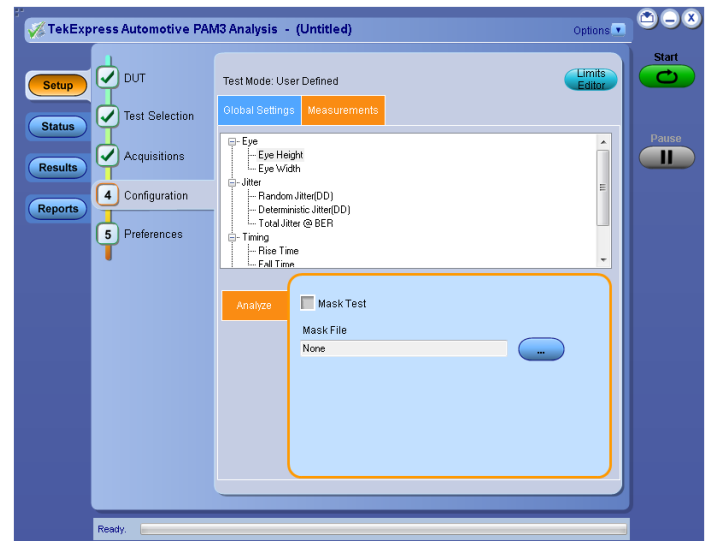

Measurement configuration

Protocol Decode

The Tektronix Protocol Decode solution does not require a directional coupler to separate the traffic. Without disturbing the system, you can perform Protocol Decode at the design level, for ECU development, or for system debug for in-car testing. You can also perform Protocol Decode on multiple ECUs simultaneously to perform timing analysis or to debug. Users can define various protocol level conditions to stop the acquisition and debug on a specific event.



Automotive Ethernet Protocol Decode for full-duplex ECU

MSO oscilloscope



6 Series MSO oscilloscope

With up to 8 GHz analog bandwidth, 25 GS/s sample rates and a 12-bit Analog-To-Digital converter (ADC), Tektronix 5/6 Series MSO provide the performance needed to capture waveforms with high signal fidelity and resolution for viewing small waveform details on Automotive Ethernet signals.

The 5/6 Series MSO provide the performance to capture signals of interest while minimizing the effects of unwanted noise, letting you capture high-amplitude signals while viewing the smaller signal details. At the heart of the 5/6 Series MSO are 12-bit analog-to-digital converters that provide 16 times the vertical resolution of traditional 8-bit ADCs.

Probing and test fixtures

For direct probing of a DUT, a differential voltage probe with a bandwidth of ≥ 1 GHz and a current probe with a bandwidth ≥ 120 MHz are recommended. The Tektronix TDP1500 or TDP3500 differential voltage probe and TCP0030A or P6022 current probe are recommended for 100BASE-T1.

Accessing signals at the ECU level may require a fixture for Signal Separation. Contact Tektronix to learn more about custom fixture design for ECUs.

Ordering Information

Required hardware	5 Series MSO oscilloscope (1 GHz Option 5-BW-1000 or 2 GHz Option 5-BW-2000) or 6 Series MSO oscilloscope with minimum bandwidth of 1 GHz (Option 6-BW-1000, 6-BW-2500, 6-BW-4000, 6-BW-6000, 6-BW-8000) Option 5-WIN, Opt. 6-WIN or SUP5-WIN, SUP6-WIN (removable SSD with Microsoft Windows 10 operating system)
Required software	Option 5-AUTOEN-SS or 6-AUTOEN-SS (Automotive Ethernet Signal Separation) Option 5-PAM3 or 6-PAM3 (PAM3 Analysis) Option 5-DJA or 6-DJA (Advanced Jitter and Eye Analysis) Option 5-CMAUTOEN or 6-CMAUTOEN (TekExpress 100BASE-T1/1000BASE-T1 Automotive Ethernet Compliance) Option 5-SRAUTOEN1 or 6-SRAUTOEN1 (100BASE-T1 Protocol Decode)
Recommended options	Option 5-AUTO-BND or 6-AUTO-BND (Automotive Ethernet Compliance, Signal Separation, PAM3 Analysis (requires Option 5-DJA), 100BASE-T1 Serial Decode (bundle option)) Option 5-RL-125M or SUP5-RL-125M (adds 125 M record length) Option 5-SRAUTO or 6-SRAUTO, SUP5-SRAUTO or SUP6-SRAUTO (adds CAN, CAN FD, LIN, FlexRay Serial Bus Trigger and Decode) Option 5-SREMBD or 6-SREMBD, SUP5-SREMBD or SUP6-SREMBD (adds I ² C, SPI Serial Bus Trigger and Decode)
Probing	TDP1500 or TDP3500 differential probe(s), TCP0030A or P6022 current probe(s)
Recommended test fixtures	Contact Tektronix for ECU dependent fixtures
Recommended extras	External PC monitor USB keyboard USB mouse



Tektronix is registered to ISO 9001 and ISO 14001 by SRI Quality System Registrar.



Product(s) complies with IEEE Standard 488.1-1987, RS-232-C, and with Tektronix Standard Codes and Formats.



Product Area Assessed: The planning, design/development and manufacture of electronic Test and Measurement instruments.

ASEAN / Australasia (65) 6356 3900
Belgium 00800 2255 4835*
Central East Europe and the Baltics +41 52 675 3777
Finland +41 52 675 3777
Hong Kong 400 820 5835
Japan 81 (3) 6714 3086
Middle East, Asia, and North Africa +41 52 675 3777
People's Republic of China 400 820 5835
Republic of Korea +822 6917 5084, 822 6917 5080
Spain 00800 2255 4835*
Taiwan 886 (2) 2656 6688

Austria 00800 2255 4835*
Brazil +55 (11) 3759 7627
Central Europe & Greece +41 52 675 3777
France 00800 2255 4835*
India 000 800 650 1835
Luxembourg +41 52 675 3777
The Netherlands 00800 2255 4835*
Poland +41 52 675 3777
Russia & CIS +7 (495) 6647564
Sweden 00800 2255 4835*
United Kingdom & Ireland 00800 2255 4835*

Balkans, Israel, South Africa and other ISE Countries +41 52 675 3777
Canada 1 800 833 9200
Denmark +45 80 88 1401
Germany 00800 2255 4835*
Italy 00800 2255 4835*
Mexico, Central/South America & Caribbean 52 (55) 56 04 50 90
Norway 800 16098
Portugal 80 08 12370
South Africa +41 52 675 3777
Switzerland 00800 2255 4835*
USA 1 800 833 9200

* European toll-free number. If not accessible, call: +41 52 675 3777

For Further Information. Tektronix maintains a comprehensive, constantly expanding collection of application notes, technical briefs and other resources to help engineers working on the cutting edge of technology. Please visit www.tek.com.

Copyright © Tektronix, Inc. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks, or registered trademarks of their respective companies.

